


Uniclass Pr_25_93_72_12	
CI/SfB	(41)+(47) Ne
	MAR 2026

7° minimum pitch
Yes, really.

ERLUS ^e KARAT RS CLAY TILES

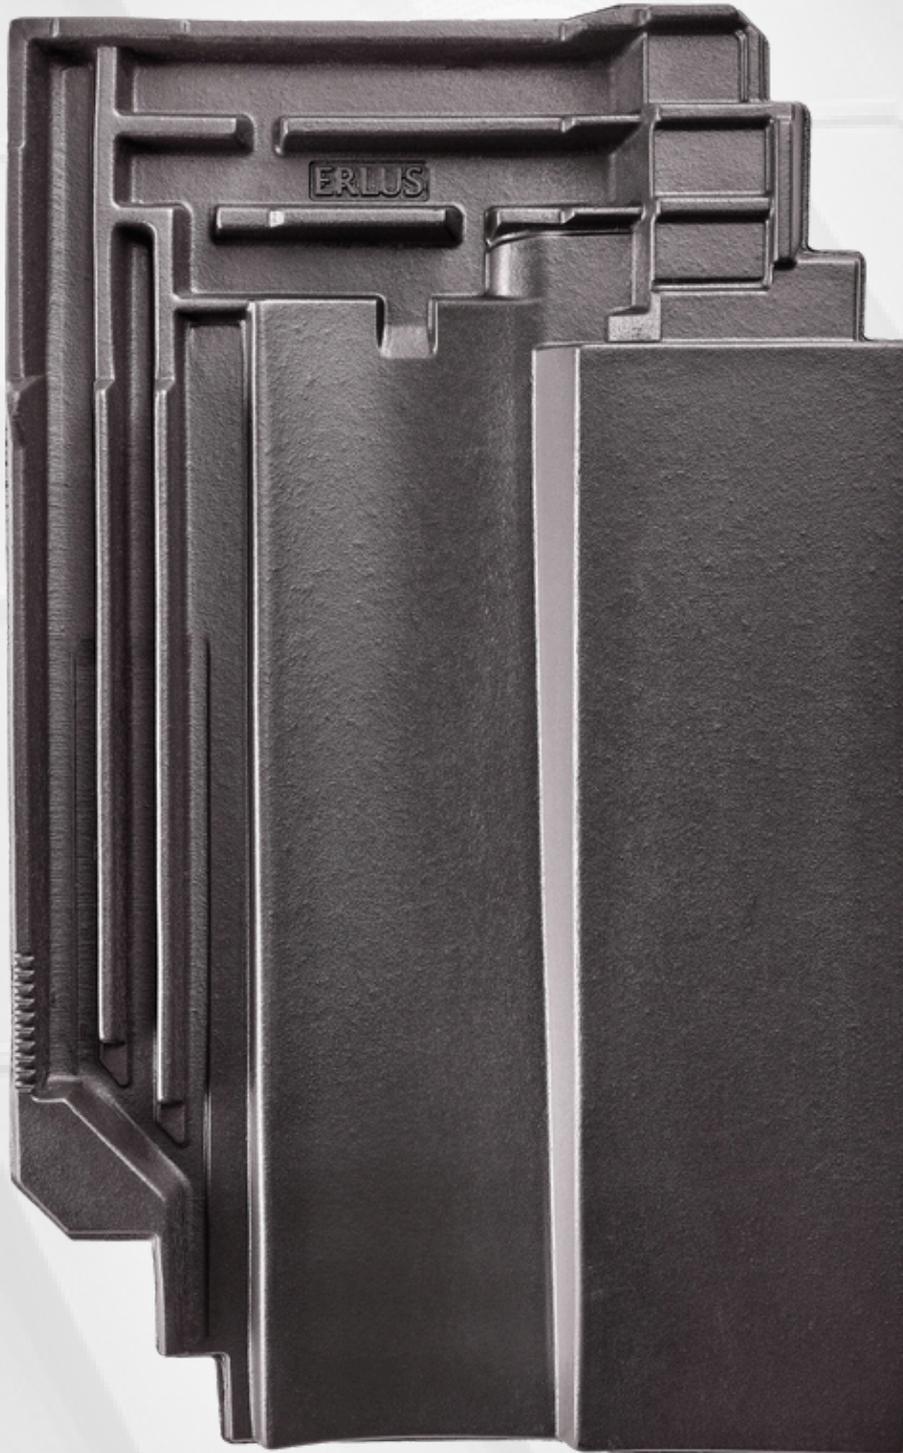

Made in Germany,
Distributed in the UK by Stoneleaf Building Materials

Minimum pitch of 7° when fitted in accordance with manufacturer's specifications

www.stoneleaftiles.co.uk

01277 841 555



ERLUS KARAT RS CLAY TILES

Size:	aprox. 270 x 435 mm
Gauge:	aprox. 338 - 343 mm
Cover width:	aprox. 200 mm
Tiles per m ² :	aprox. 14.7 Pieces
Minimum Pitch	7° (When fitted to the specification below)
Weight without battens:	aprox. 52 kg/m ²
Pallet capacity:	224 Pieces
Pallet weight:	aprox. 890 kg
Bundle capacity:	5 Pieces

For verge to verge and lean to roofs with Rafter pitches between 7° - 10°, and a maximum rafter length of 10 metres.

The roof structure should be fully boarded using suitable timber decking. A continuous layer of Stoneleaf Sovereign 330g/m² underlay installed over the decking, with all laps sealed using the integrated tape.

Install Counter battens 38×50mm, vertically over the underlay at centres not exceeding 600 mm. Counter battens to be installed over a self-sealing tape ensuring all fixings are sealed against water ingress.

Tile battens of 25×50mm are then be fixed horizontally to the counter battens in accordance with the required gauge for Karat RS tiles, ensuring that each tile is securely clipped.

Adequate ventilation shall be provided at both the eaves and the ridge (or top edge), as per diagrams below:

fig 1 **Eave Detail**


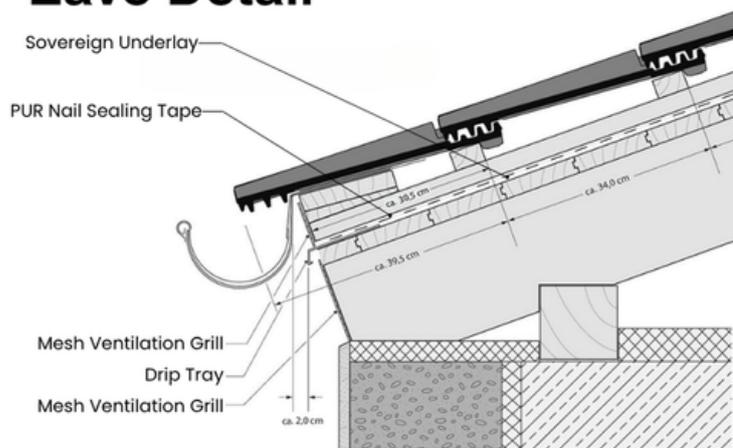


fig 2 **Ridge Detail**

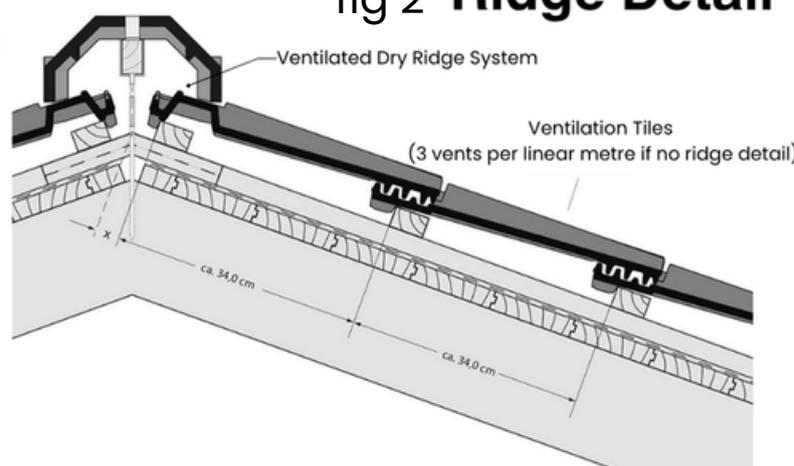

*Roofs with valley and abutments or over 10m in rafter length, please refer to Stoneleaf Technical Department.

Made in Germany,

Distributed in the UK by Stoneleaf Building Materials

Minimum pitch of 7° when fitted in accordance with manufacturer's specifications

www.stoneleaftiles.co.uk

01277 841 555

