

GHR Conwy Grey Natural Slate

GORDON H RICHARDS



Natural Slate
Specialists since 1930

Our **Conwy Grey Natural Slates** bring together durability, elegance and exceptional performance for projects across the UK. Quarried from premium slate deposits, this slate provides a roof covering fit for the finest modern or period properties.

Quarried, split, and selected to the highest standards, Conwy Grey offers exceptional characteristics, making it a natural choice for discerning roofers, architects, specifiers and homeowners. Every batch undergoes rigorous sorting to ensure extraordinary regularity in both thickness and dimensional accuracy, **making the Conwy Grey one of the flattest slates on the market**, thus saving both time and reducing costs associated with sorting and grading for slaters.

Featuring a natural, subtle colour variation, Conwy Grey is verified non-fading, tested annually to British Standard 12326-2 with W1-S1-T1 results. These natural slates are guaranteed to maintain their striking aesthetic for generations. **Tested and verified annually by Celtest in North Wales.**

We maintain comprehensive stock holding across a full range of standard and non-standard sizes. Stock is available in traditional imperial dimensions including 20"x12", 22"x11", 24"x12", 24"x14", and 24"x18".



500x250mm 5mm



24x12" 6mm



500x250mm 5mm



500x250mm 6mm


24"x14" Inch

24"x12" Inch



22"x11" Inch

500x300mm

500x250mm



**Imperial
Dimensions**

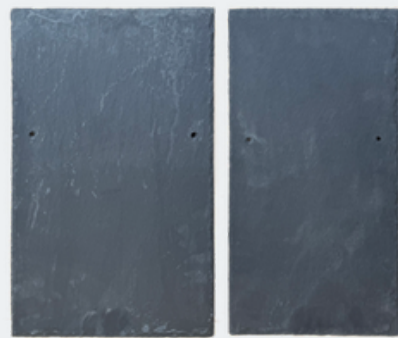

**Metric
Dimensions**

Our ability to consistently supply formats as large as 24"x18" stands as direct proof of the exceptional strength and flawless quality of the raw quarry block.



500x300mm 6mm

Technical Details

Sizes Available:	500x250 Holed 305mm 500x300 Holed 323mm and Un-holed 22"x11" (560x280) Un-holed 24"x12" (610x305) Holed 370mm 24x14" (610x355) Un-holed 24x18" (610x455) Un-holed
Grade	Best
Approx thickness	5.5mm and 6.5mm
Colour	Blue/Grey
Texture	Smooth Surface, Dressed Edges
Coverage /m2	19.1 at 90mm headlap using 500x250mm
Weight when laid	36kg/m2 based on 500x250 6mm
Source	Shaanxi Provence
BS EN 12326-1:1:2014 Test Results: July 2026	
Water Absorbtion	W1/A1 0.16%
Thermal Cycle	T1
Sulphur Dioxide Exposure	S1

Guarantee :
Best Grade – 75 Years
Site specific guarantee
available upon request

Meets Requirements for :



The Old Slate Depot,
Llanrwst Road,
Llansanffraid Glan
Conwy,
Colwyn Bay LL28 5TH

Tel: 01492 581530

sales@ghrichards.co.uk
www.ghrichards.co.uk